

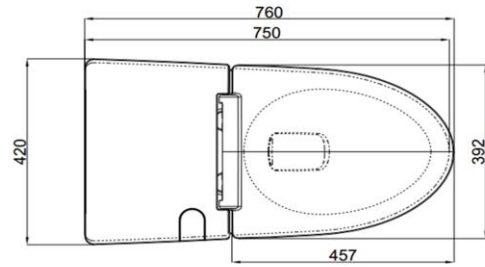


SPECIFICATION SHEET OF BOWL

Product Type	One piece toilet
Basic Dimension	L760*W420*H461
Certification	follow the Norm list
Quality Requirement	American Standard
Flushing Action	Top push button
Special Flush (Platform)	Siphon Jet, rimless, Optimum Flush system
Flush Volume	4.8L
Coating on Ceramic	White glaze only, no Anti-bac, no Aqua
Rimless	Yes
Additional Glazing Area	Trap inside need Glaze, glaze under rim
Color	White Heat II (Asia white)
Brand Logo	American Standard on seat cover, but ceramic no logo
Installation	Floor quick stick tape, fix with drainage flange
Seat&Cover	PP seat, (Made in WDI)
E-bidet Matching	Runner CCS system
Conceal Tank System	NA
Tank Trim	Runner CCS system
Roughing-In	305RI only
Water Connection	15/16" for Indo-China, G1/2 for APAC
Water Pressure	0.16(>23psi)-0.55 Mpa static presssure
Package	Carton box
Weight	45kg
Material	VC
Similar Model	NA
MFG Location	Ceramic:DongPeng, Optimum flush: Runner, FG in Runner.
Mold Design	NA
Reference Code	NA
Market	
Other Remark	

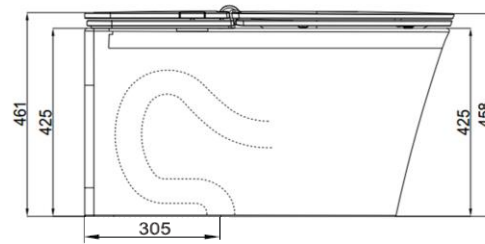

20220627 3D rendering picture revised Gordon

LIXIL Link to Good Living	Document No.:	ARD-FG-SPXXXX		
		Studio S OptimFlush Toilet		
Document Type:	Finished Goods Specification		Revision:	A.1
Issued by:	Gordon Hu	Approved by:	Andy Liu	
Customer:	AS Region	MFG:	OEM: Runner	
Develop:	LIXIL R&D Hub	Release Date:	2022.6.23	
				Page: 1 of 1